


Carving
COLLECTION
1200x
1600 мм

CONNECTING THE VALUE OF SLAB

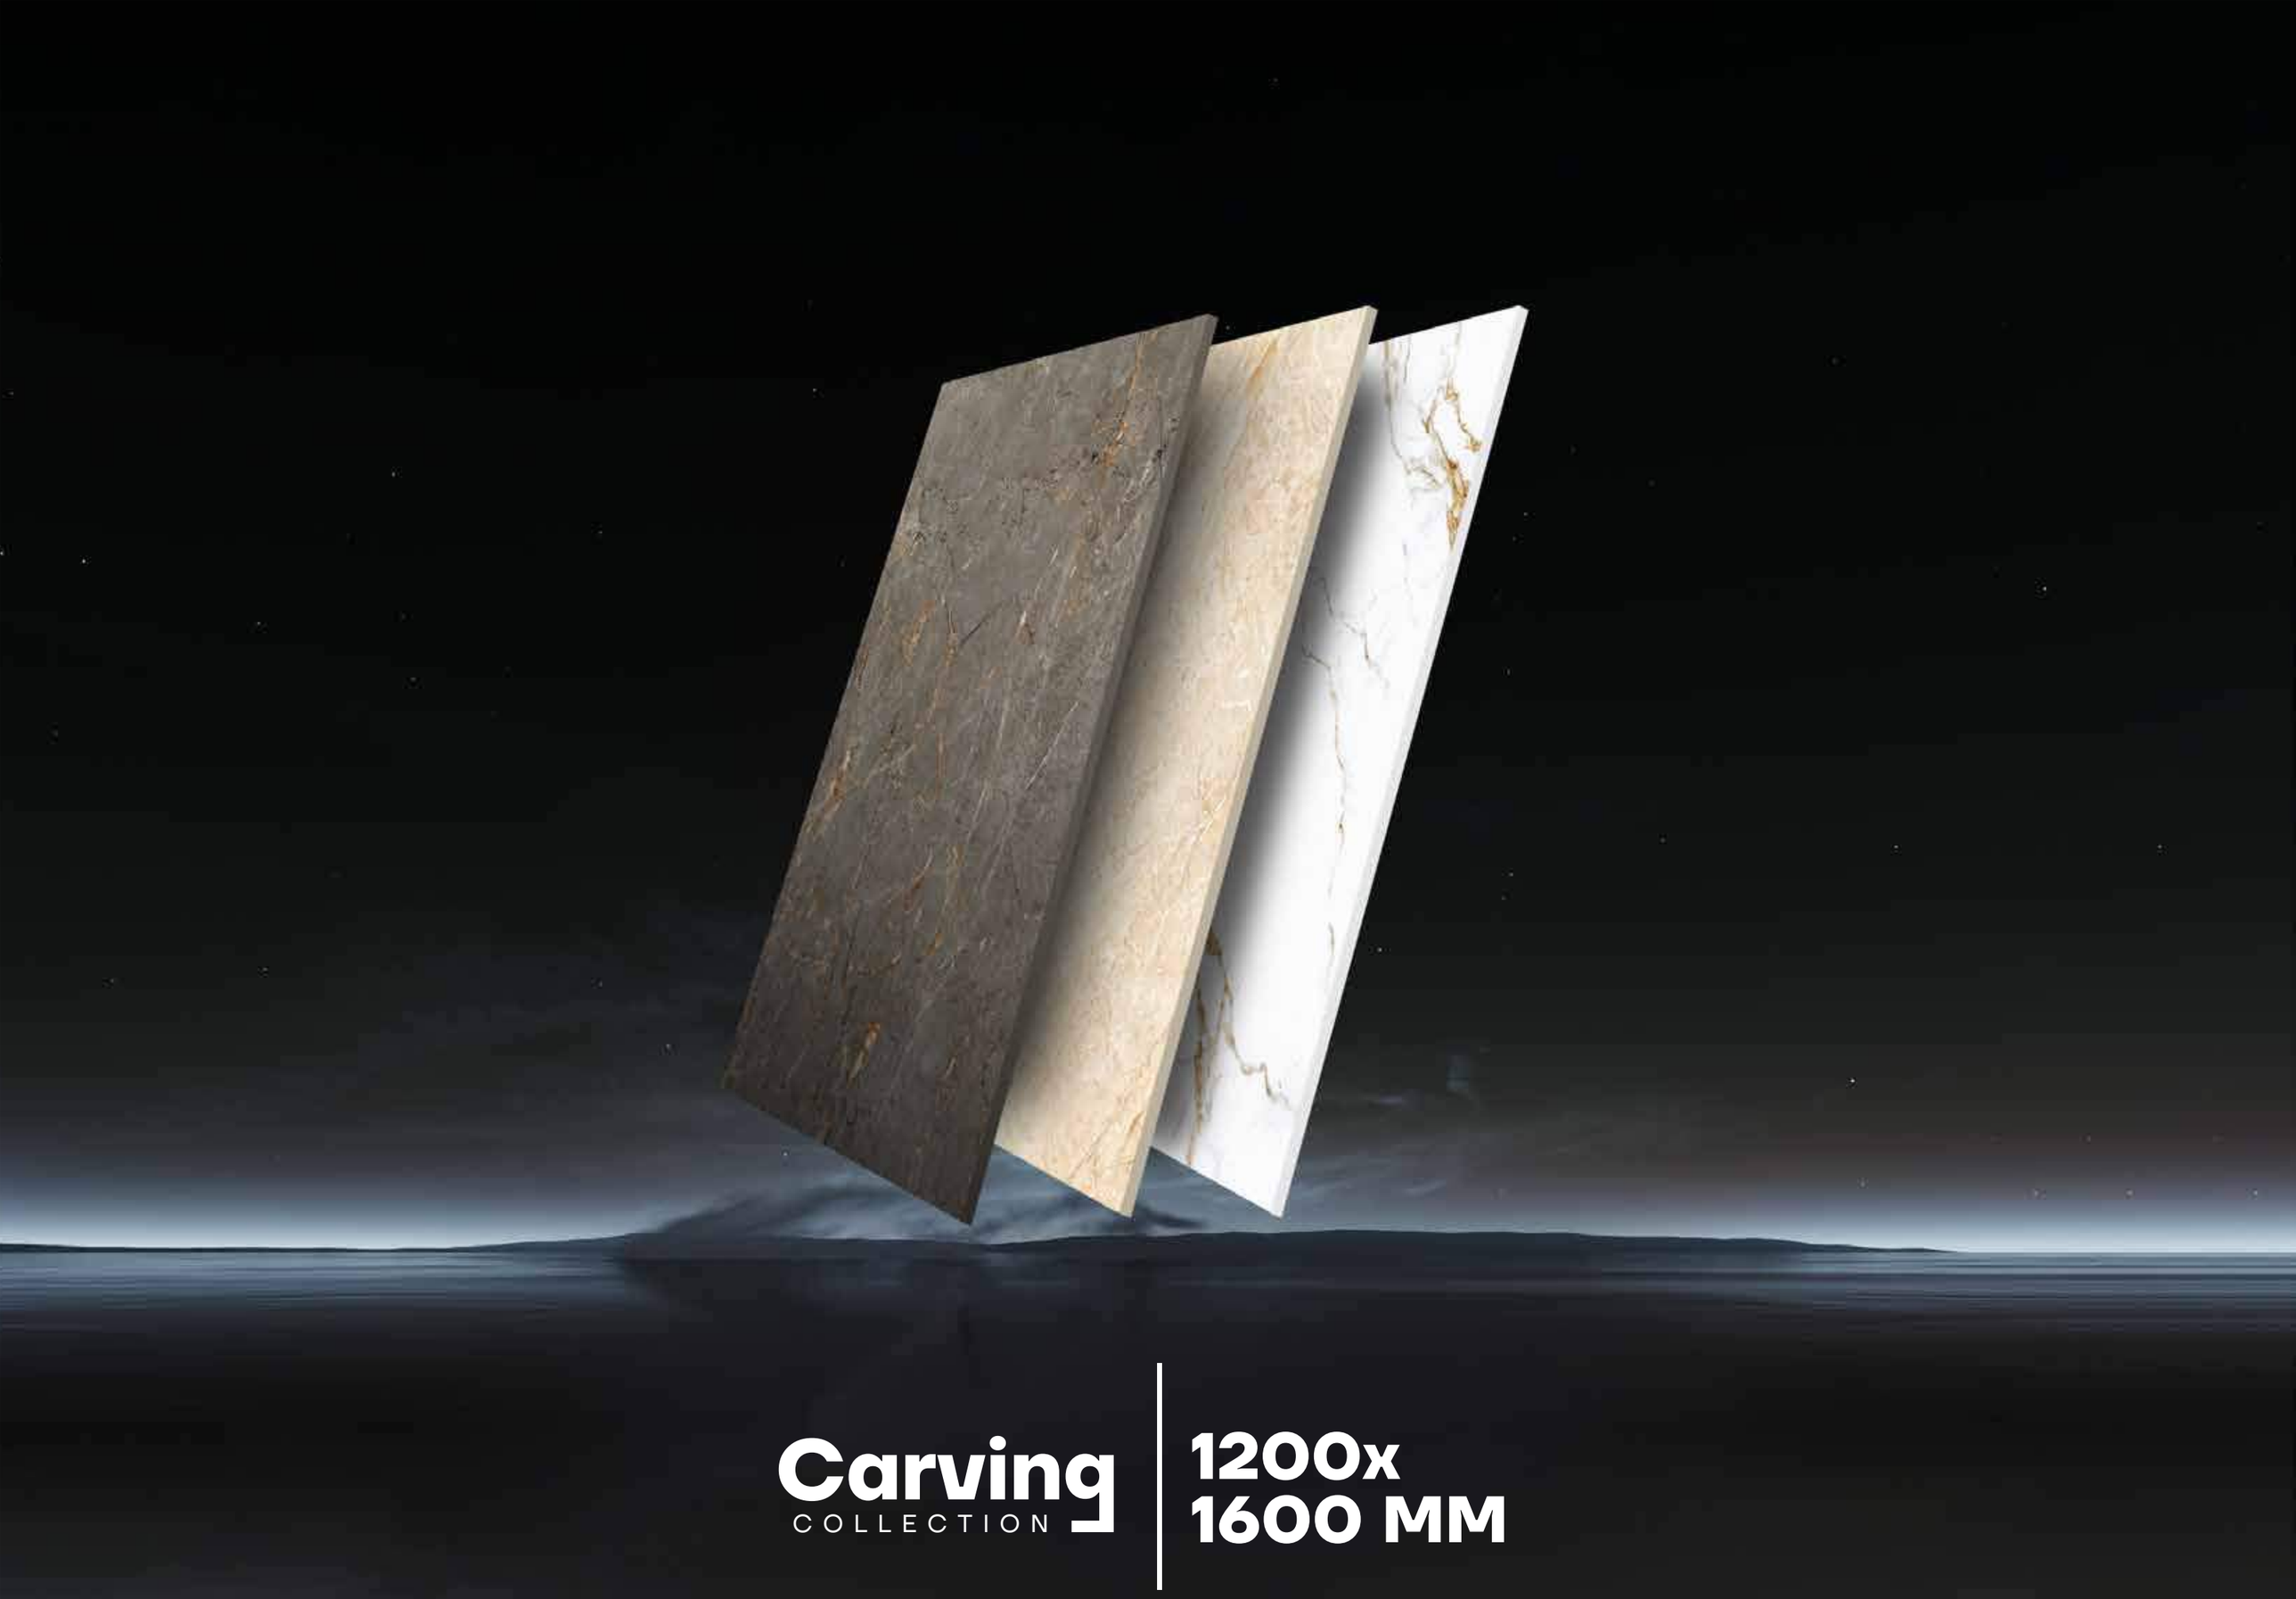


CONTINUA+ LAMGEA SYSTEM Lamina


CONTINUA+ is the most efficient, highest-productivity technology for the accurately managed manufacture of porcelain slabs and tiles, also producible with traditional bodies. The slabs are, in fact, formed without using a traditional press or mould, ensuring maximum flexibility in terms of size and thickness.

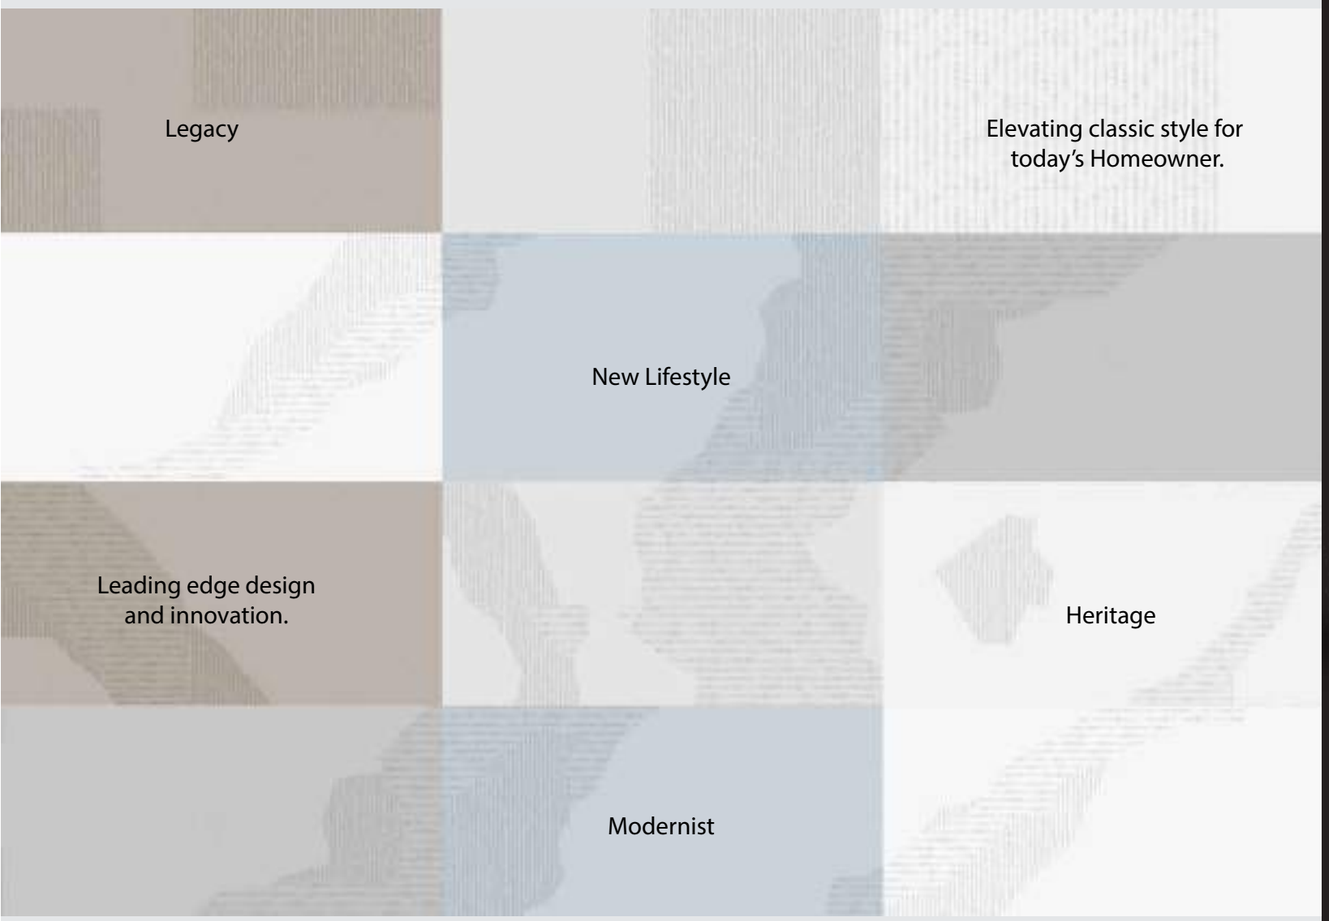

CONTINUA+ seamlessly integrates the powder forming phase and subsequent digital decoration. The key strengths of this exclusive process are high quality texturing and unrivalled surface shine.

PRODUCT
Formats

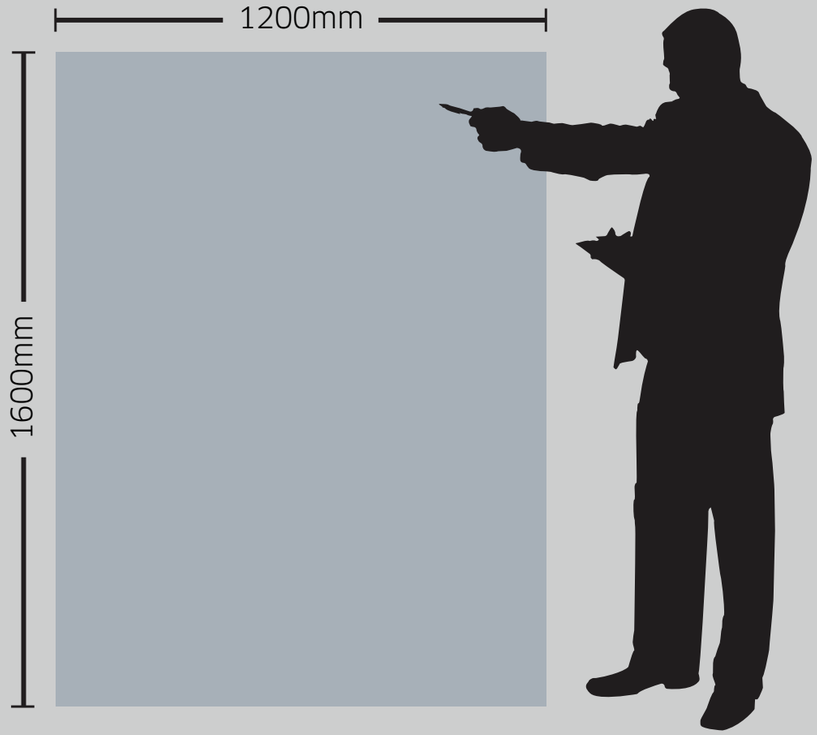

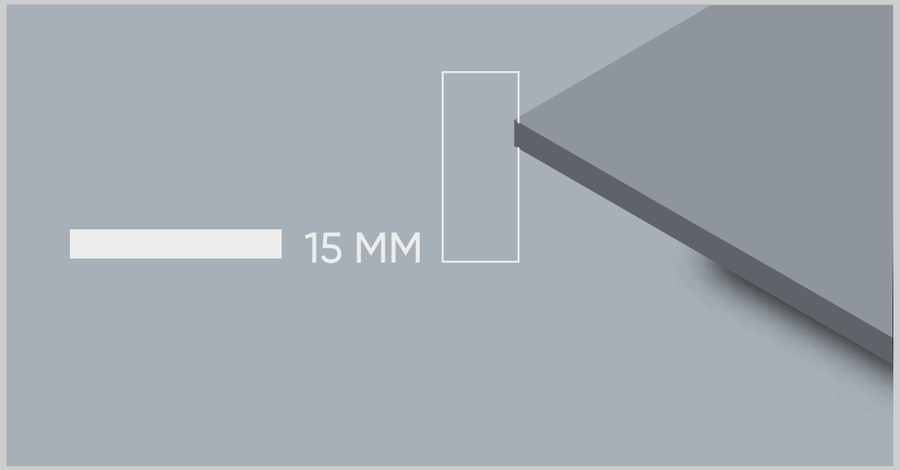

The thicknesses are one of the most important elements characterizing.

15 mm is set aside for the most demanding product applications such as kitchen countertops.

Grey



White



IVORY



Carving
COLLECTION

Our collections offer professional-grade performance while seamlessly blending the latest innovations with a premium design aesthetic that is crafted with authentic, high-quality materials.

The Functionality of
The Residential Kitchen

Elevating Classic Style
for Today's Homeowner

Leading Edge Design
and Innovation

PRODUCT Range


ATLANTIC GREY


BAGNARA


BULGARI GREY


CARNEL GREY


DENIM GREY


RIVA GREY


TRAVERTINE CLASSIC GREY


VERSACE GOLD


VINTAGE GREY


CAPRICORN GOLD

STATUARIO LIVON


ALBERT BEIGE


BLUETEE


BOTTOCHINO VENATO

BENTON BEIGE

CARNEL IVORY


DENIM BEIGE


VICTORIA BEIGE

REGAL NATURAL


TRAVERTINE CLASSIC

PRODUCT Finishes

CARVING

The Carving effect not only provides a depth effect to your flooring but also adds a shinning effect.




Carving
COLLECTION

REVEL IN THE MAJESTIC

BEAUTY OF CARVING

Born for the crest of creation, the slabs reflect the exceptional beauty of nature through their excellent designs that create a glorious ambiance in your space.

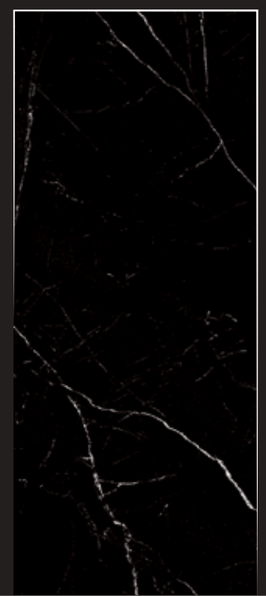

Carving
COLLECTION

Carving
COLLECTION



FEEL THE ABSOLUTE

ART OF ELEGANCE

Carving collection renew the legacy of a depth effect
that has always been popular in architecture, to offer contemporary
design the prestige and timeless appeal of carefully selected
by our designers.

APPLICATION Areas

AIRPORT

DISCOTHEQUES

INDUSTRIES

GYMNASIUMS

HOTELS

CORRIDORS HALLS

SCHOOLS

SUPER MARKET

OFFICE

TECHNICAL Features

LIGHTWEIGHT

WATERPROOF

RESISTANT TO SCRATCHES

RESISTANT TO HIGH TEMPERATURES

EASY TO CLEAN

RESISTANT TO BENDING

100% NATURAL

RECYCLABLE

HYGIENIC

RESISTANT TO UV RAYS

ATLANTIC GREY







ATLANTIC GREY

Random Face 3

BODY

GREY BODY

FINISH

CARVING

SIZE

1200x1600 MM

THICKNESS

15 MM

Carving
COLLECTION



BAGNARA







BAGNARA

Random Face 3

BODY

GREY BODY

FINISH

CARVING

SIZE

1200x1600 MM

THICKNESS

15 MM

Carving
COLLECTION



BULGARI GREY







BULGARI GREY

Random Face 3

BODY

GREY BODY

FINISH

CARVING

SIZE

1200x1600 MM

THICKNESS

15 MM

Carving
COLLECTION



DENIM GREY







DENIM GREY

Random Face 3

BODY

GREY BODY

FINISH

CARVING

SIZE

1200x1600 MM

THICKNESS

15 MM

Carving
COLLECTION



TRAVERTINE CLASSIC GREY







TRAVERTINE CLASSIC GREY

Random Face 3

BODY

GREY BODY

FINISH

CARVING

SIZE

1200x1600 MM

THICKNESS

15 MM

Carving
COLLECTION



VERSACE GOLD







VERSACE GOLD

Random Face 3

BODY

GREY BODY

FINISH

CARVING

SIZE

1200x1600 MM

THICKNESS

15 MM

Carving

COLLECTION

VINTAGE GREY







VINTAGE GREY

Random Face 3

BODY

GREY BODY

FINISH

CARVING

SIZE

1200X1600 MM

THICKNESS

15 MM

Carving
COLLECTION



CAPRICORN GOLD







CAPRICORN GOLD

Random Face 3

BODY

WHITE BODY

FINISH

CARVING

SIZE

1200x1600 MM

THICKNESS

15 MM

Carving
COLLECTION

STATUARIO LIVON







STATUARIO LIVON

Random Face 3

BODY

WHITE BODY

FINISH

CARVING

SIZE

1200x1600 MM

THICKNESS

15 MM

Carving
COLLECTION



ALBERT BEIGE







ALBERT BEIGE

Random Face 3

BODY

IVORY BODY

FINISH

CARVING

SIZE

1200x1600 MM

THICKNESS

15 MM

Carving
COLLECTION



BLUETEE







BLUETEE

Random Face 3

BODY

IVORY BODY

FINISH

CARVING

SIZE

1200x1600 MM

THICKNESS

15 MM

Carving
COLLECTION

BOTTOCHINO VENATO







BOTTOCHINO VENATO

Random Face 3

BODY

IVORY BODY

FINISH

CARVING

SIZE

1200x1600 MM

THICKNESS

15 MM

Carving
COLLECTION

BENTON BEIGE



BENTON BEIGE

Random Face 3

BODY

IVORY BODY

FINISH

CARVING

SIZE

1200X1600 MM

THICKNESS

15 MM

Carving
COLLECTION

CARNEL IVORY







CARNEL IVORY

Random Face 3

BODY

IVORY BODY

FINISH

CARVING

SIZE

1200X1600 MM

THICKNESS

15 MM

Carving
COLLECTION



DENIM BEIGE







DENIM BEIGE

Random Face 3

BODY

IVORY BODY

FINISH

CARVING

SIZE

1200X1600 MM

THICKNESS

15 MM

Carving

COLLECTION

REGAL NATURAL







REGAL NATURAL

Random Face 3

BODY

IVORY BODY

FINISH

CARVING

SIZE

1200X1600 MM

THICKNESS

15 MM

Carving
COLLECTION



RIVA BEIGE







RIVA BEIGE

Random Face 3

BODY

IVORY BODY

FINISH

CARVING

SIZE

1200x1600 MM

THICKNESS

15 MM

Carving
COLLECTION

TRAVERTINE CLASSIC







TRAVERTINE CLASSIC

Random Face 3

BODY

IVORY BODY

FINISH

CARVING

SIZE

1200X1600 MM

THICKNESS

15 MM

Carving
COLLECTION

VICTORIA BEIGE







VICTORIA BEIGE

Random Face 3

BODY

IVORY BODY

FINISH

CARVING

SIZE

1200X1600 MM

THICKNESS

15 MM

Carving
COLLECTION

Cleaning & Maintenance

Our products are non porous (due to their high quality raw materials, stringent production parameters and state of the art technology), hence any dust or deposited waste cannot penetrate the surface.

For most cases only a damp cloth is sufficient for cleaning.

Regular cleaning highlights the aesthetic features of the surface and gives it exceptional shine.

For highly aggressive cleaning caused by some common food and substances follow the table below.

TYPE OF STAIN	CHEMICAL PRODUCT	EXAMPLE
Grease	Alkaline - Solvent	Detergent
Oil	Solvent	Ammonia, Backing Soda
Ink	Oxidant - Solvent	Alcohol, Liquid Bleach, Nail Paint Remover
Rust	Acid	Hydrochloric Acid, Vinegar, Red Harpic
Lime	Acid	Descaling Reagent, Hydro Chloric Acid
Cement	Acid	Hydro Chloric Acid
Wine	Alkaline	Ammonia, Liquid Bleach
Coffee	Alkaline - Solvent	Ammonia, Liquid Bleach
Rubber	Solvent	Alcohol, Thinner
Plaster	Acid	Hydro Chloric Acid
Candle Wax	Solvent	Alcohol, Thinner
Iodine	Oxidant	Liquid Bleach
Blood	Oxidant	Liquid Bleach
Ice Cream	Alkaline	Liquid Bleach

Note: It is recommended that any kind of stain needs to get clean immediately / as soon as possible.

Technical Specification

CHARACTERISTIC	STANDARD AS PER ISO13006:2018/ EN14411 Gr.BIa	MEAN VALUE	TEST METHOD
Regulatory Properties			
Deviation in Length and Width	± 0.30 % (±1.00mm)	± 0.10 %	ISO 10545-2
Deviation in Thickness	± 5.00 % (±0.50mm)	± 5.00 %	ISO 10545-2
Straightness in Side	± 0.30 % (±0.80mm)	± 0.10 %	ISO 10545-2
Rectangularity	± 0.30 % (±1.50mm)	± 0.10%	ISO 10545-2
Surface Flatness Central Curvature	± 0.40 % (±1.80mm)	± 0.50 %	ISO 10545-2
Surface Flatness Edge Curvature	± 0.40 % (±1.80mm)	± 0.50 %	ISO 10545-2
Surface Flatness Warpage	± 0.40 % (±1.80mm)	± 0.50 %	ISO 10545-2
Surface Quality	> 95% defects free	> 95% defects free	ISO 10545-2
Small Color Difference(for Plain Colour)	ΔE < 1.00	ΔE < 0.30	ISO 10545-16
Glossiness (Polished)	as per mfg.	Gloss Value> 90	Gloss Meter 60°
Glossiness (Matt)	as per mfg.	3 <Gloss Value<7	Gloss Meter 60°
Glossiness (Satin/Posh)	as per mfg.	7<Gloss Value<18	Gloss Meter 60°
Structural Properties			
Water absorption	≤ 0.50 %	≤ 0.060 %	ISO 10545-3
Bulk density	as per mfg.	Min. 2.28 g/cc	ISO 10545-3
Massive Mechanical Properties			
Modulus of rupture	Min. 35.0 N/mm²	Min. 42.0 N/mm²	ISO 10545-4
Breaking strength thickness <7.5	Min. 700.0 N	Min. 1000.0 N	ISO 10545-4
Breaking strength thickness ≥7.5	Min. 1300.0 N	Min. 1800.0 N	ISO 10545-4
Breaking strength thickness ≥(7.5mm)	Min. 1300.0 N	Min. 7500.0 N	ISO 10545-4
Surface Mechanical Properties			
MOH'S hardness #	as per mfg.	Glossy Min. 4*/ Posh Min. 6	BS EN 15771
Surface abrasion resistance #	as per mfg.	Glossy Min. 2/ Posh Min. 3	ISO 10545-7
Deep abrasion resistance #	Max. 175mm³	Max. 132mm³	ISO 10545-6
Thermal Hydrometric Properties			
Moisture expansion	Max. 0.06%(0.6mm/m)	Max. 0.02mm/m	ISO 10545-10
Thermal expansion(COE) at 100°C	as per mfg.	Max. 6.0 x 10⁻⁶	ISO 10545-8
Thermal shock resistance	Min. 10 Cycle	Min. 10 Cycle	ISO 10545-9
Impact resistance(COR) #	Min. 0.55	Min. 0.55	ISO 10545-5
Frost resistance	as per mfg.	Frost Proof	ISO 10545-12
Chemical Properties			
Resistance to staining glazed	Min. Class 3	Min. Class 4	ISO 10545-14
Resistance to household chemicals & swimming pool salts glazed	Min. Class GB	Min. Class GA	ISO 10545-13
Resistance to low concentrate acid and alkalis glazed	as per mfg.	Min. Class GLB**	ISO 10545-13
Resistance to high concentrate acid and alkalis glazed	as per mfg.	Min. Class GHB**	ISO 10545-13
Safety Properties			
Skid resistance(DCOF-DRY) ##	as per mfg.	Glossy P0(<¹²) / Posh ≥P¹(¹²-²4)	BS 7976-2
Slip resistance(DCOF)(R value) ##	as per mfg.	R9 to R¹³	DIN 51130
Fire resistance	as per mfg.	Fire Proof	N.A.

* With Nano polished
** Except Hydrofluoric Acid & it's compound
# Tiles Intended for use on floor
As per customer requirement

Packing Details

PRODUCT	BODY	SIZE	THICKNESS	TILES / BOX	COVERAGE AREA / BOX	WEIGHT (Kg)
Carving	Color Body	1200x1600mm	15mm	1pc	20.67 Sq ft	67 Kgs